
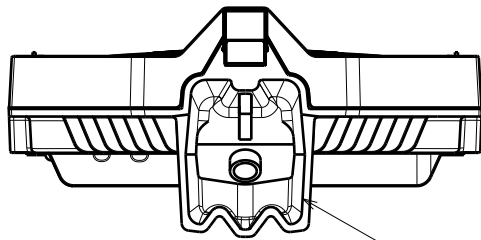
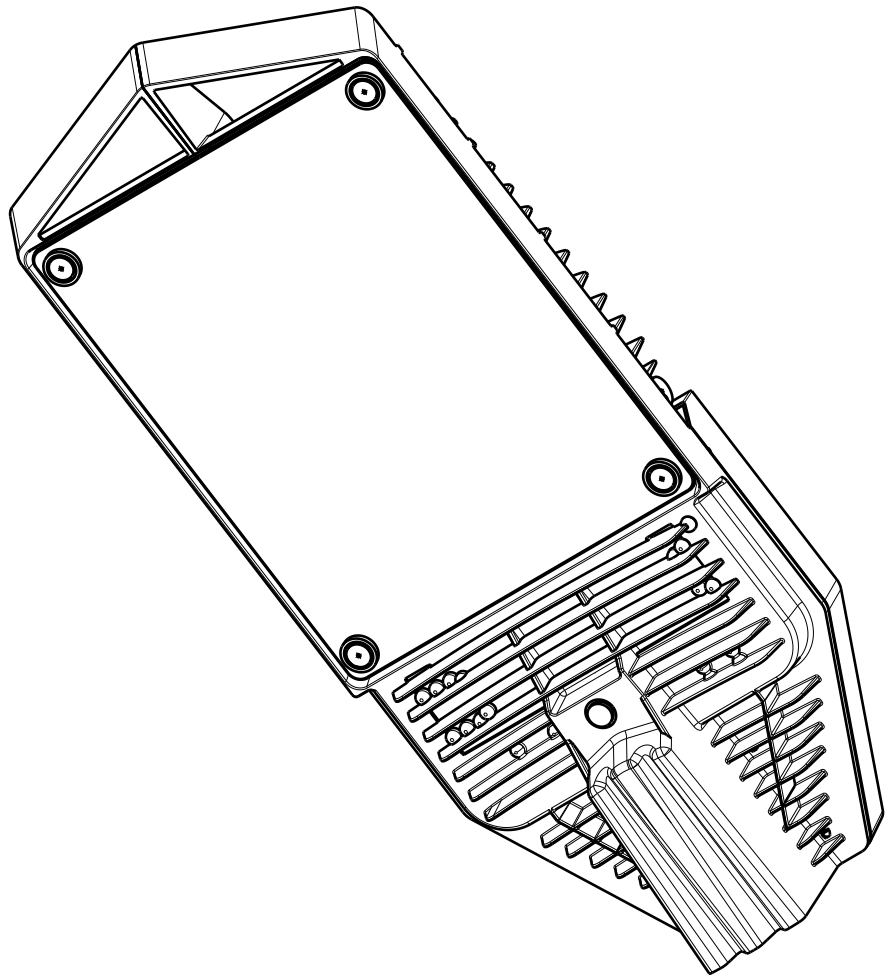


記号 SYM.	区 域 ZONE	変 更 事 項 REVISIONS	変更表示 REV. NO.	通知番号 NTF. NO.	日 付 DATE	担当 REV. BY
		NEW DRAWING ISSUE	A	ED156021	14/08/2020	C.Chanchai

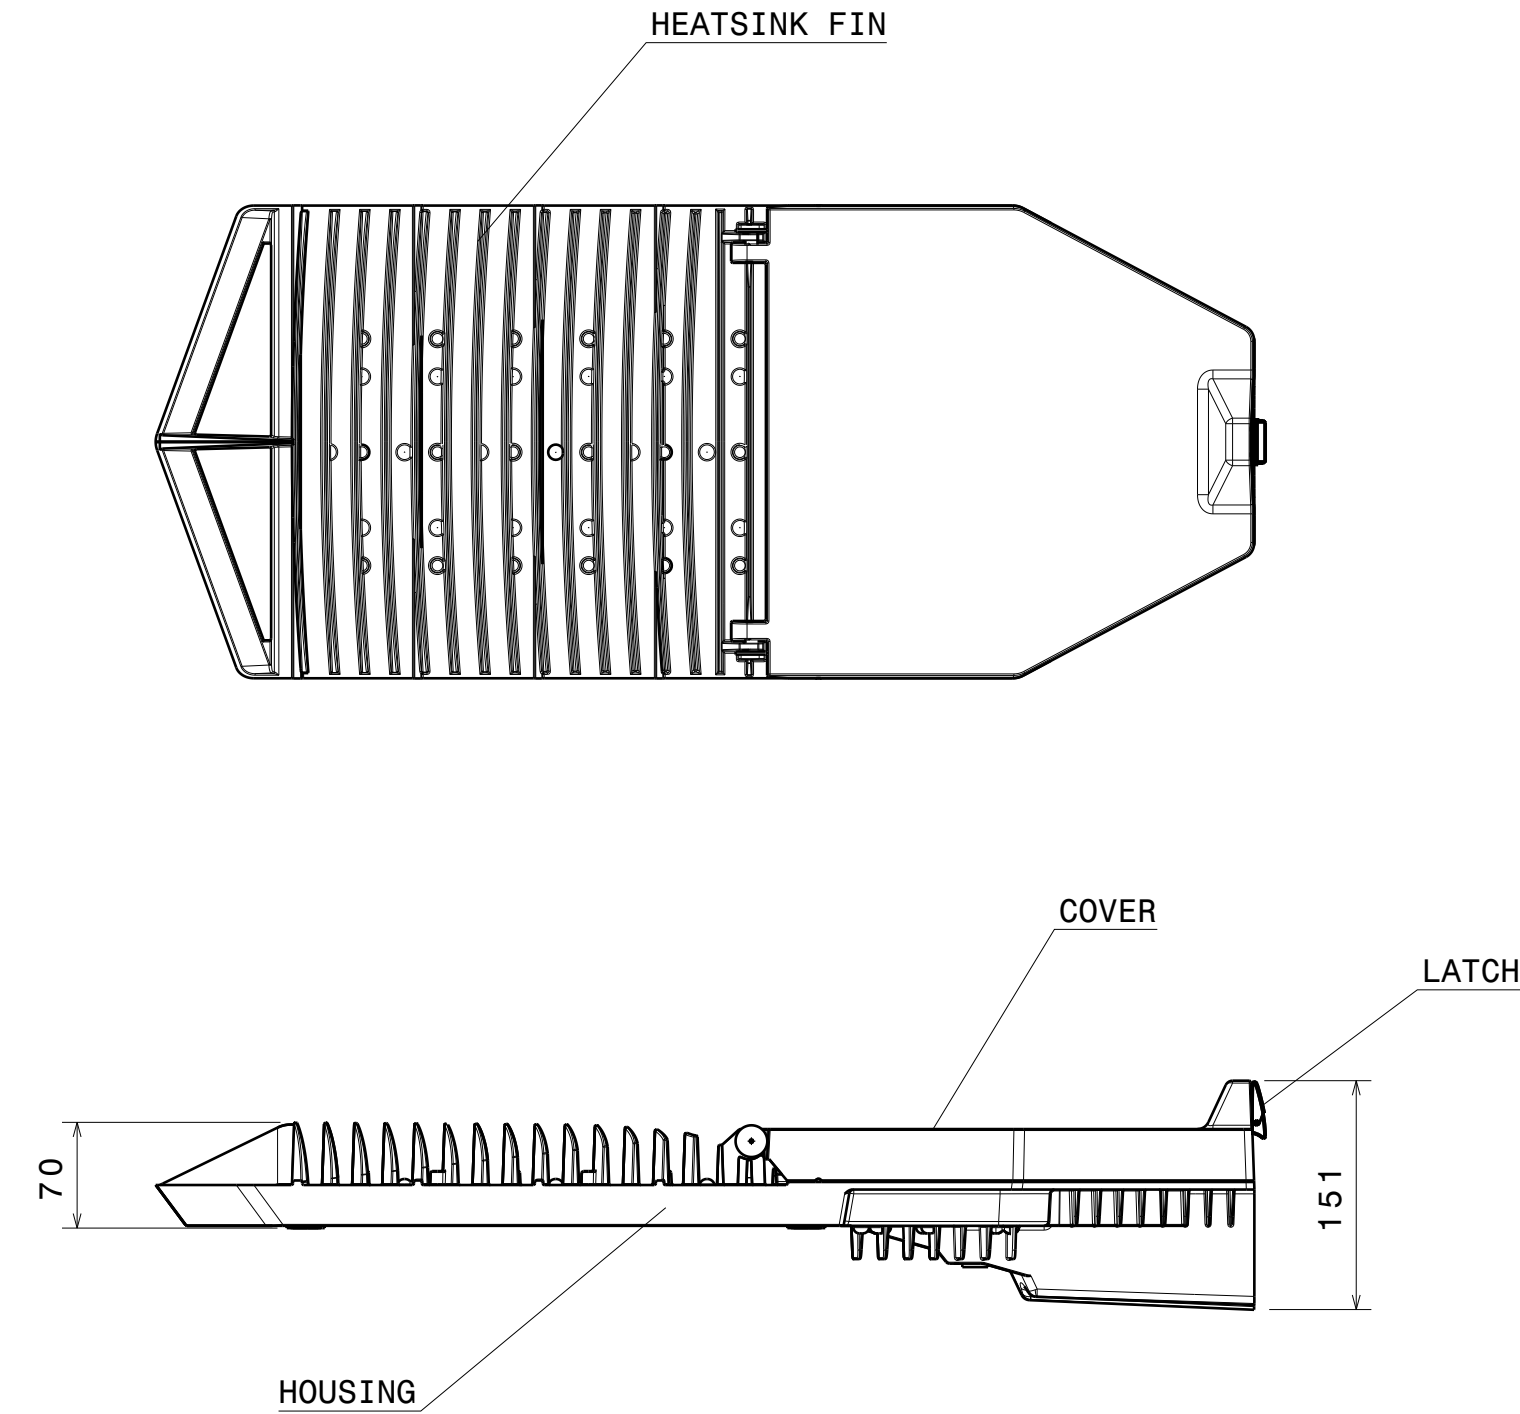

INSTALLATION OF POLE : $\phi 60.5$

NOTES.

1. MATERIAL
HOUSING:ADC12 (POWDER COATING:GRAY)
COVER:ADC12 (POWDER COATING:GRAY)
GLASS:TEMPERED GLASS
LATCH:SUS304
SCREW M5:SWCH16A (COATING:GEOMET)
2. CORROSION RESIST
CASS TEST 240HR
SALT SPRAY TEST 240HR
3. WATER PROOF:IP66
4. MECHANICAL IMPACT:IK08
5. ROHS COMPLIANT
6. THAT OF GREEN PROCUREMENT GUIDELINES ADAPTATION OF STANLEY ELECTRIC CO.,LTD.

記号 SYM.	品名コード PART CODE	部 品 名 PART NAME	品 名 N A M E	図 番 DWG. NO.	数量 QTY.	備 考 REMARKS
材質 MATAL.		設計 DGN.	検図 CHK.	品名コード PART CODE 3890591000		
処理 FINISH		制定日 DWG. DATE	承認 APP.	品 名 NAME LLF0139A/LEN1/120/E/IN/A		
質量 MASS		14.08.2020	S.ABE			
尺度 SCALE	1:5	Stanley Electric Co., Ltd.			図 番 DWG. NO. D00207788A	
単位 UNIT	mm					

M5 SCREW FOR FIXING TEMPERED GLASS
* DON'T LOOSEN SCREW M5. THERE IS A POSSIBILITY THAT THE TEMPERED GLASS WILL FALL FROM HOUSING.